

TRACK PENDANT SERIES

TRACK LIGHTING




Key Feature

- Stylish appearance in black and white finish
- High quality light output,Ra (R9) typ.: 93(50)
- Available in 15 or 25 or 45 degree beam angle.
- Integrated driver and track adapter
- Lifetime: 50,000hrs (L80, B20, Ta=25 C , 12hours/Day).

Key Specification

- Input voltage: 220-240VAC 50/60Hz.
- Power factor: 0.93C.
- Luminaire input power: 32W
- Luminous Flux: 3400lm @840.
- Luminaire efficacy: 106lm/W @840.
- Ra (R9) typ.: 83(00)
- Chromaticity tolerance (initial MacAdam): 3 SDCM.
- CCT: 3000K, 3500K, 4000K, CRISP WHITE(3000K)
- Beam angle: 15°/25°/45°
- Ta: -20~35°C.
- N.W. : 350 g.
- Housing: Diecasting aluminum spray paint.
- Reflector: Spinning aluminum plated.
- Type of light source: Directional light source

Dimensions: (mm)




Specifications

Order no.	Model	Power ^[1] (W)	Ra (R9) ^[3] typ	CCT ^[2] (K)	Beam ^[4] angle	Luminous ^[5] flux(lm)	Luminaire ^[6] efficacy(lm/w)	EEC ^[7]	UGR	QTY/CTN (pcs)	G.W./CTN (kg)	SIZE/CTN (mm)
1030-111120-0130			83(00)	3000		3300	103	E		4	5.5	325x305x280
1030-111120-0131			83(00)	3500		3300	103	E		4	5.5	325x305x280
1030-111020-0130			83(00)	4000	15°	3400	106	E	<17	4	5.5	325x305x280
1030-111120-0132			93(50)	CRISP WHITE		2100	66	G		4	5.5	325x305x280
1030-111120-0133			97(90)	3000		2500	78	F		4	5.5	325x305x280
1030-111020-0131			97(90)	4000		2500	78	F		4	5.5	325x305x280
1030-111120-0134			83(00)	3000		3300	103	E		4	5.5	325x305x280
1030-111120-0135			83(00)	3500		3300	103	E		4	5.5	325x305x280
1030-111020-0132 TRACKPENDANT-R1-220V 32			83(00)	4000	25°	3400	106	E	<17	4	5.5	325x305x280
1030-111120-0136 (WHITE)			93(50)	CRISP WHITE		2100	66	G		4	5.5	325x305x280
1030-111120-0137			97(90)	3000		2500	78	F		4	5.5	325x305x280
1030-111020-0133			97(90)	4000		2500	78	F		4	5.5	325x305x280
1030-111120-0138			83(00)	3000		3300	103	E		4	5.5	325x305x280
1030-111120-0139			83(00)	3500		3300	103	E		4	5.5	325x305x280
1030-111020-0134			83(00)	4000	45°	3400	106	E	<17	4	5.5	325x305x280
1030-111120-1130			93(50)	CRISP WHITE		2100	66	G		4	5.5	325x305x280
1030-111120-1131			97(90)	3000		2500	78	F		4	5.5	325x305x280
1030-111020-0135			97(90)	4000		2500	78	F		4	5.5	325x305x280
1030-111120-1132			83(00)	3000		3300	103	E		4	5.5	325x305x280
1030-111120-1133			83(00)	3500		3300	103	E		4	5.5	325x305x280
1030-111020-0136			83(00)	4000	15°	3400	106	E	<17	4	5.5	325x305x280
1030-111120-1134			93(50)	CRISP WHITE		2100	66	G		4	5.5	325x305x280
1030-111120-1135			97(90)	3000		2500	78	F		4	5.5	325x305x280
1030-111020-0137			97(90)	4000		2500	78	F		4	5.5	325x305x280
1030-111120-1136			83(00)	3000		3300	103	E		4	5.5	325x305x280
1030-111120-1137 TRACKPENDANT-R1-220V 32			83(00)	3500		3300	103	E		4	5.5	325x305x280
1030-111020-0138 (BLACK)			83(00)	4000	25°	3400	106	E	<17	4	5.5	325x305x280
1030-111120-1138			93(50)	CRISP WHITE		2100	66	G		4	5.5	325x305x280
1030-111120-1139			97(90)	3000		2500	78	F		4	5.5	325x305x280
1030-111020-0139			97(90)	4000		2500	78	F		4	5.5	325x305x280
1030-111120-2130			83(00)	3000		3300	103	E		4	5.5	325x305x280
1030-111120-2131			83(00)	3500		3300	103	E		4	5.5	325x305x280
1030-111020-1130			83(00)	4000	45°	3400	106	E	<17	4	5.5	325x305x280
1030-111120-2132			93(50)	CRISP WHITE		2100	66	G		4	5.5	325x305x280
1030-111120-2133			97(90)	3000		2500	78	F		4	5.5	325x305x280
1030-111020-1131			97(90)	4000		2500	78	F		4	5.5	325x305x280


- [1]: Measurement precision for input voltage/current /power +/- 10%, W = kWh/1000h.
- [2]: Comply with ANSI C78.377
- [3]: Minimum Ra(TYP.) is rated value - 2.
- [4]: Beam angle $\leq 20^\circ$, measurement precision +/- 20%; beam angle $> 20^\circ$, measurement precision +/- 15 %.
- [5]: Minimum Luminous flux is 90% of rated value.
- [6]: Minimum Luminaire efficacy is 90% of rated value.\
- [7]: Energy efficiency class, as determined in accordance with Commission Delegated Regulation (EU) 2019/2015.

Photometrics(reference)

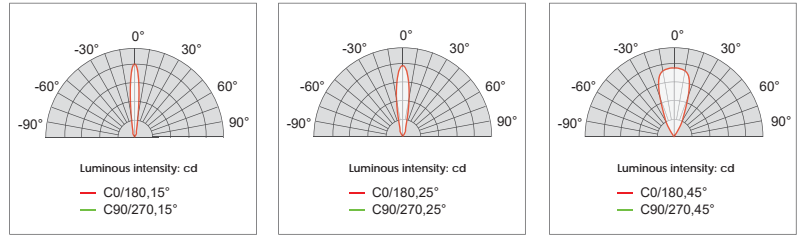

Color Bin Definition

Chromaticity tolerance (initial MacAdam): 3 SDCM (3000K, 3500K, 4000K, CRISP WHITE)
 Color coordinates (CIEx, CIEy): 3000K(0.4338, 0.4030), 3500K(0.4073, 0.3917), 4000K(0.3818, 0.3797), CRISP WHITE(0.430, 0.395)
 Measurement precision for x, y +/- 0.005

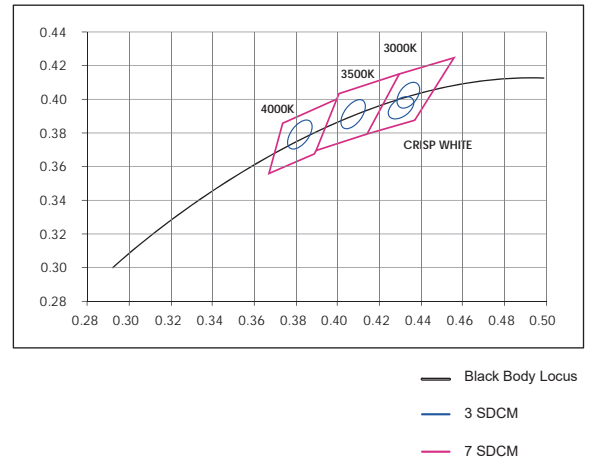

Standards

- EN60598-1
- EN 60598-2-1
- EN62471
- EN61547
- EN55015
- EN61000-3-2
- EN61000-3-3

Sales & Technical Support

SELF Electronics Germany GmbH

August-Horch-Str. 7, 51149 Cologne
Phone: +492203-18501-0
Fax: 492203-18501-199
E-mail: saleseu@self-electronics.com

SELF Electronics Co.,Ltd.(Headquarters)

Add: No. 1345 JuXian Road, Ningbo Hi Tech Park, Ningbo, China 315103
Phone: +86-574-2880-5765, +86-574-2880-5658 (for English assistance)
+86-574-2880-5678 (for Chinese assistance)
Fax: +86-574-28805656
E-mail: sales@self-electronics.com
<http://www.self-electronics.com>

SELF Electronics USA Corporation

3264 Saturn Ct, Peachtree Corners, GA 30092
Phone: +1-770-248-9023
Fax: +1-770-248-9028
E-mail: salesus@self-electronics.com

* Due to continuous improvements and innovations, specifications may change without notice.